

FIRE DOOR MODEL 708




The MUL-T-LOCK fire door model 708 is a decorative fire resistant steel door, available with fire resistant windows (4 optional designs).

Door model 708 is rated as 2 hour fire door.

Available with or without locking mechanism, may be combined with a variety of panic exit devices.

Construction frame

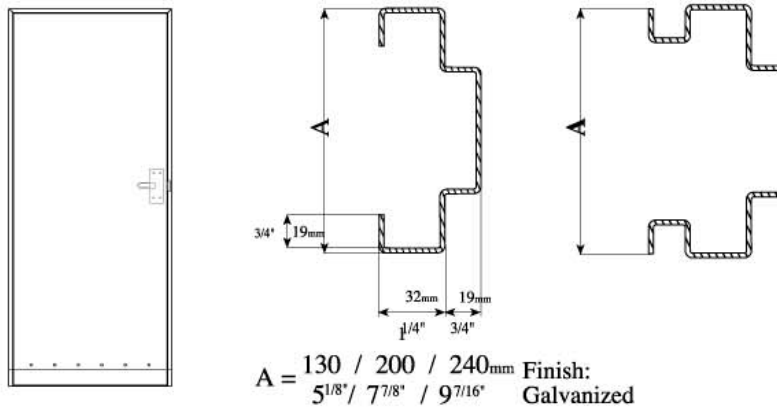

A = 130 / 200 / 240mm Finish: Galvanized
 5¹/₈" / 7⁷/₈" / 9⁷/₁₆"

Approval:

1. SII standard 1212 - Fire doors: Fire resistance.
2. SII spec. 196 - Multi-bolt lock for side hinged doors.
3. Israeli standards spec. 950 - Cylindrical locking device for mortise door locks, Jan. 1986.

Structure:

The Steel Door is made of two 1.25mm (18 gauge) thick galvanized steel casing, which are reinforced by 2 vertical steel bars, placed along the leaf between the casings and welded to the casings.

Thermal insulation:

The gaps between the vertical bars are filled with rockwool, with a density of 120 Kg/m³ (7.5 lb/ft³) and 6mm (1/4") thick special fire resistant plate.

Door weight :

The standard door leaf weighs approximately 60 Kg (133.33 lb) including the bottom insert & lock.

Door dimensions:

	Door height without lower insert	Range of coverage scope in height		Door width	
		Min size	Max size		
1685mm	66 ⁵ / ₁₆ "	1715mm	67 ¹ / ₂ "	1810mm	71 ¹ / ₄ "
1785mm	70 ¹ / ₄ "	1815mm	71 ⁷ / ₁₆ "	1910mm	75 ³ / ₁₆ "
1885mm	74 ³ / ₁₆ "	1915mm	75 ³ / ₈ "	2000mm	78 ³ / ₄ "
1910mm	75 ³ / ₁₆ "	1940mm	76 ³ / ₈ "	2040mm	80 ⁵ / ₁₆ "
1985mm	78 ¹ / ₈ "	2015mm	79 ⁵ / ₁₆ "	2110mm	83 ¹ / ₁₆ "
2085mm	82 ¹ / ₁₆ "	2115mm	83 ¹ / ₄ "	2210mm	87"
2185mm	86"	2215mm	87"	2310mm	90 ¹⁵ / ₁₆ "
2285mm	89 ¹⁵ / ₁₆ "	2315mm	91 ¹ / ₈ "	2410mm	94 ⁷ / ₈ "
2385mm	93 ⁷ / ₈ "	2415mm	95 ¹ / ₁₆ "	2500mm	98 ⁷ / ₁₆ "

The door leaf is supplied in a variety of widths, in increments of 20mm (13/16")
 Min - 300mm (11¹³/₁₆") Max - 1300mm (51³/₁₆").
note: single leaf fire doors can be ordered in width sizes 1100mm- (43⁵/₁₀") - 1300mm (51³/₁₀") only.

Double door : Accessories & Hardware :

The door leaf is 50mm (2") thick.

A combination of two available width sizes.

MUL-T-LOCK slam-lock model 206 (Standard application), and automatic fire protection mechanism.

MUL-T-LOCK 3 way lock model 265 (Optional).

Note: Doors available without locking mechanism, to be combined with a variety of panic exit devices.



MUL-T-LOCK®

MUL-T-LOCK reserves the right to make any product improvements or modifications without prior notice. © 1/2001